


McKissick® Sheaves

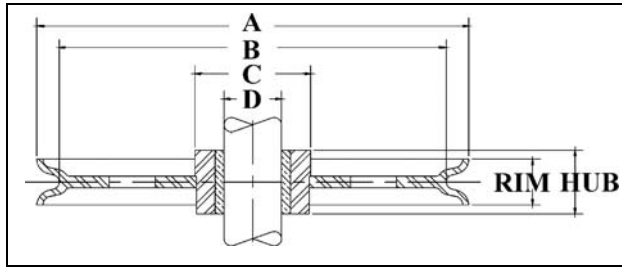

SEE APPLICATION AND WARNING INFORMATION
 Para Español: www.thecrosbygroup.com See Pages 342-349

Bronze Bushed Sheaves

- Roll Forged™ sheaves are available in sizes up to 1829mm in diameter.
- McKissick® Bronze Bushed Sheaves are equipped with S.A.E. 660 Bronze Bushings for cold finished shafts with "Figure 8" oil groove. For sizes not listed, McKissick® Finished Bore Sheaves can be equipped with bronze bushings at an optional charge.

"A" Nominal Outside Diameter (mm)*	Stock No.	Pattern Number	Wire Line Size (mm)	"D" Shaft Size (mm)	Hub Width (mm)	Rim Width (mm)	"C" Nominal Hub Outside Dia. (mm)	"B" Nominal Tread Dia. (mm)	Material	Approx. Weight (kg)
57.0	907004	1173	6	9.55*	15.9	14.3	19.1	47.6	B.S.	0.34
-	-	-	-	-	-	-	-	-	-	-
76.0	907059	1173	5	9.55*	19.8	19.1	25.4	60.5	P.M.	0.45
76.0	907077	1173	5	12.7*	19.8	19.1	25.4	60.5	P.M.	0.45
76.0	907095	1173	5	15.9*	19.8	19.1	25.4	60.5	P.M.	0.45
76.0	907022	1173	6	9.55*	12.7	12.7	25.4	66.5	P.M.	0.34
76.0	907040	1173	6	12.7*	12.7	12.7	25.4	66.5	P.M.	0.34
76.0	460165	3X	6	12.7*	33.3	30.0	28.6	52.5	B.S.	0.45
76.0	460110	3-1	8	19.1	25.4	22.2	44.5	57.0	P.M.	0.68
76.0	907068	1173	10	9.55*	19.1	19.1	25.4	60.5	P.M.	0.45
76.0	916101	1208	10	9.55*	19.8	19.1	38.1	60.5	B.S.	0.45
76.0	907086	1173	10	12.7*	19.1	19.1	25.4	60.5	P.M.	0.45
76.0	916110	1208	10	12.7*	19.8	19.1	38.1	60.5	B.S.	0.45
76.0	460156	3X	10	12.7	33.3	30.0	28.6	52.5	B.S.	0.45
76.0	907102	1173	10	15.9*	19.1	19.1	25.4	60.5	P.M.	0.45
76.0	2023196	3-1	10	19.1	25.4	22.2	44.5	57.0	P.M.	0.68
76.0	2023202	3-1	11	19.1	25.4	22.2	44.5	57.0	P.M.	0.68
76.0	916129	1208	13	9.55*	31.8	28.6	47.6	51.0	B.S.	0.60
76.0	916138	1208	13	12.7*	31.8	28.6	47.6	51.0	B.S.	0.68
-	-	-	-	-	-	-	-	-	-	-
102	460290	4-1	3	25.4	25.4	22.2	51.0	79.5	B.S.	0.91
102	907111	1173	5	12.7*	19.1	15.9	34.9	89.0	P.M.	0.45
102	907139	1173	5	15.9*	19.1	15.9	34.9	89.0	P.M.	0.45
102	916147	1208	6	12.7*	20.6	19.1	51.0	82.5	B.S.	0.68
102	916165	1208	6	19.1*	20.6	19.1	51.0	82.5	B.S.	0.68
102	460307	4-1	6	25.4	25.4	22.2	51.0	79.5	B.S.	0.91
102	907120	1173	8	12.7*	19.1	15.9	34.9	89.0	P.M.	0.45
102	907148	1173	8	15.9*	19.1	15.9	34.9	89.0	P.M.	0.45
102	907166	1173	10	12.7*	20.6	19.1	38.1	82.5	P.M.	0.57
102	916156	1208	10	12.7*	20.6	19.1	51.0	82.5	B.S.	0.68
102	907184	1173	10	15.9*	20.6	19.1	38.1	82.5	P.M.	0.64
102	907200	1173	10	19.1*	20.6	19.1	38.1	82.5	P.M.	0.57
102	460316	4-1	10	25.4	25.4	22.2	51.0	79.5	B.S.	0.91
102	907228	1173	13	12.7*	27.0	25.4	41.3	81.0	P.M.	0.68
102	916192	1208	13	12.7*	28.6	25.4	41.3	81.0	B.S.	0.91
102	907246	1173	13	15.9*	27.0	25.4	41.3	81.0	P.M.	0.68
102	907264	1173	13	19.1*	27.0	25.4	41.3	81.0	P.M.	0.68
102	916174	1208	10	19.1*	20.6	19.1	51.0	82.5	B.S.	0.68
-	-	-	-	-	-	-	-	-	-	-
105	2023186	4-K	10	25.4	38.1	34.9	51.0	76.0	F.S.	1.59
105	2023183	4-K	13	25.4	38.1	34.9	51.0	76.0	F.S.	1.59
105	2023188	4-K	16	25.4	38.1	34.9	51.0	76.0	F.S.	1.59
-	-	-	-	-	-	-	-	-	-	-
108	460450	4E	10	15.9*	30.2	23.8	54.0	85.5	B.S.	1.09
108	460441	4E	13	15.9*	30.2	23.8	54.0	85.5	B.S.	1.09
-	-	-	-	-	-	-	-	-	-	-
121	460575	5-2	8	15.9	39.7	34.9	38.1	92.0	D.I.	1.59
121	460584	5-2	10	15.9	39.7	34.9	38.1	92.0	D.I.	1.59
121	460593	5-2	13	15.9	39.7	34.9	38.1	92.0	D.I.	1.59
-	-	-	-	-	-	-	-	-	-	-