

McKissick® Scrap Handling Blocks

SEE APPLICATION AND WARNING INFORMATION
 Para Español: www.thecrosbygroup.com On Pages 342-349


381-SY



- All single point shank hooks are genuine Crosby®, forged alloy steel, Quenched and Tempered, and have the patented **QUIC-CHECK®** markings.
- Durable - Allows longer continuous duty cycle.
- Can be used with magnet and drop ball
- Single sheave design
- Dual action hook (Swings and Rotates)
- Utilize McKissick® Roll-Forged™ sheaves with flame hardened grooves.
- Furnished standard with Bronze Bushed Sheaves.
- Optional Tapered Roller Bearings.
- All sizes are **RFID EQUIPPED**.



381-SY Scrap Handling Blocks

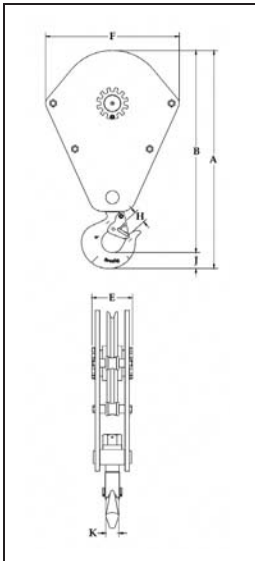

Model No.	381-SY Inquiry Stock No.	Working Load Limit (t)*	Sheave Diameter (mm)	Standard Wire Line (mm)	Weight Each (kg.)	Dimensions (mm)						
						A	B	E	F	H	J	K
S15S16L	2014810	13.5	406	14-22	129	944	868	161	578	70.0	75.5	60.5
S20S18L	2014812	18.0	457	16-25	179	1004	929	174	629	70.0	75.5	60.5
S25S20L	2014814	22.5	508	19-28	209	1071	995	174	679	70.0	75.5	60.5
S30S24L	2014816	27.0	610	22-32	320	1281	1189	199	781	82.5	92.0	76.0
S40S24L	2014818	36.0	610	22-32	370	1418	1289	199	781	86.0	129	82.5

* Ultimate Load is 4 times the Working Load Limit.