

# Western Wire Rope Blocks

**SEE APPLICATION AND WARNING INFORMATION**  
 Para Español: [www.thecrosbygroup.com](http://www.thecrosbygroup.com) On Pages 342-349

## New Style Oval Pattern Construction Blocks



Q-681-Z



Q-682-Z



Q-683-Z

- All blocks are galvanized.
- Sheave lubricated through pressure lube fitting in center pin.
- Assembled with self lubricated bronze bushing.
- Combines weight of regular oval blocks with strength of extra heavy oval blocks.
- Assembled with bolt type anchor shackle.
- Side plates are rounded to provide additional stiffness and reduce wear and chaffing of the rope.

Block Size (in.)	Fitting	Stock No. Bronze Bushed Steel Sheaves		
		Q-681-Z	Q-682-Z	Q-683-Z
6	Q	760441	760665	760801
6	Q	760452	760676	760812
8	Q	760463	760687	760823
10	Q	760474	760698	760834


Block Size (in.)	Sheave Dimensions (mm)			Wire Rope Size (mm)	Working Load Limit (t)*			Weight Each (kg)		
	Outside Diameter	Rim Thickness	Center Pin Diameter		Single	Double	Triple	Single	Double	Triple
6	152	25.4	19.1	10	2.70	3.63	-	6.8	12.7	14.5
6	152	25.4	19.1	13	2.70	3.63	4.50	7.3	12.7	14.5
8	203	31.8	25.4	16	3.63	5.44	-	13.2	20.4	28.1
10	254	31.8	25.4	16	3.63	6.35	7.25	17.2	27.7	36.3

\* Ultimate Load is 4 times the Working Load Limit.

Bearing Code: Z - Self Lubricating Bronze Bushed with pressure lube fitting.



## S-2131 Trawling Shackles

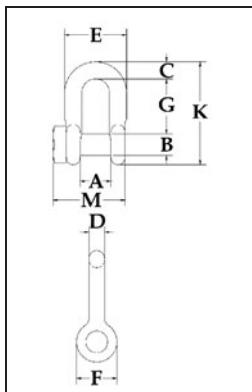

Nominal Shackle Size D (in.)	Working Load Limit (t)*	S-2131 Stock No.	Weight Each (kg)	Dimensions (mm)								Tolerance +/-		
				A	B	C	D	E	F	G	K	M	G	A
1/2	2	1018703	.34	20.6	16.0	12.7	12.7	46.0	30.2	41.4	78.5	56.5	3.30	1.50
5/8	3-1/4	1018721	.56	27.0	19.1	16.0	16.0	58.5	39.6	51.0	96.0	70.0	3.30	1.50
3/4	4-3/4	1018749	.99	31.8	22.4	20.6	19.1	70.0	47.8	60.5	114	82.5	6.35	1.50
7/8	6-1/2	1018767	1.49	36.6	25.4	24.6	22.4	81.0	54.0	71.5	133	93.5	6.35	1.50
1	8-1/2	1018785	2.27	42.9	28.7	25.4	26	93.5	60.5	81.0	151	108	6.35	1.50
1-1/8	9-1/2	1018803	3.16	46.0	31.8	31.8	28	103	68.5	91.0	172	117	6.35	1.50

\* Ultimate Load is 4 times the Working Load Limit. Also available in Anchor Type S-2091.